


Setup CAS Authentication


 You have to be the **domain admin** in order to configure the CAS authentication.

To setup the CAS authentication, login as domain admin and open Settings -> CAS authentication.

To work properly with CAS authentication server, BellaDati needs following parameters:

Name	Description
CAS login enabled	Flag indicating if CAS authentication is enabled. If CAS button is available on the BellaDati login page.
Login URL	The URL of the CAS login endpoint. E.g. http://cas.example.com/sso/login
Ticket validation URL	The URL of the CAS ticket and service validation endpoint. E.g. http://cas.example.com/sso/serviceValidate
Logout URL	The URL of the CAS logout endpoint. E.g. http://cas.example.com/sso/logout

You can configure only one CAS server in the domain.

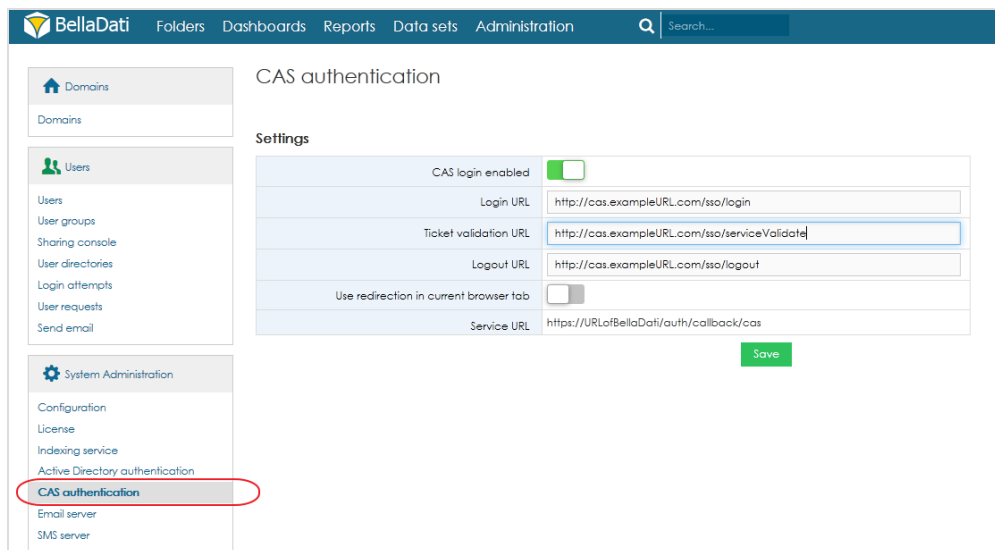

The screenshot shows the BellaDati administration interface. The top navigation bar includes 'BellaDati', 'Folders', 'Dashboards', 'Reports', 'Data sets', and 'Administration'. A search bar is also present. The left sidebar contains a menu with categories: 'Domains', 'Users', and 'System Administration'. Under 'System Administration', 'CAS authentication' is highlighted with a red circle. The main content area is titled 'CAS authentication' and displays the following settings:

- CAS login enabled:
- Login URL:
- Ticket validation URL:
- Logout URL:
- Use redirection in current browser tab:
- Service URL:

A green 'Save' button is located at the bottom right of the settings area.